

CIACUL BOOLOULLA BULGONES BARE ALVANIA GALE Sanca Alvana Gale Sanca Alvana Alvana Sanca Sanca Alvana Alvana Alvana Sanca Alvana Alvana Alvana Sanca Alvana Alvana Alvana Alvana Alvana Sanca Alvana Alvana Alvana Alvana Alvana Alvana Sanca Alvana Alvana Alvana Alvana Alvana Alvana Alvana Alvana Sanca Alvana Alvana Alvana Alvana Alvana Alvana Alvana Alvana Sanca Alvana Alva

HL A

SIL

## AUTOMATIC STICKER LABELING MACHINE SERIES



Sales: 0869 833 002 Hotline: 0334 487 184 Email: marketing@ttpack.com.vn



XT-2510

Round Bottle Labeling Machine

### Feature

- Applicable to label whole curved surfaces or half curved surfaces on rotundities from medicine, food, agrochemical and other industries.
- Using well-known motor drive which ensures a stable and reliable label-feeding speed.
- Advanced human-machine touch screen interface which is easy and and convenient to operate, with complete function and abundant online help.
- Automatic photo-electrical sensor detection function and automatic stop or alarm when no labels, or faults with labels, avoid wasting labels or omitting labels.
- Rotary rolling depression body adopting elastic sponge-covered belt makes the labels smoother, firm and with no wrinkles which enhances the packaging quality greatly.
- Simple and compact machine structure makes it easy to operate and maintain.
- You can also link the back part with assembly line or receiving platform which is convenient for collecting and packaging.

### Application



Beverage



Chemical



Cosmetic



**Health Care** 



**Daily necessities** 



Food

Specification

Model	XT-2510
Labeling Speed	40-150pcs/min(related to material and label size)
Labeling Accuracy	±1.0mm(material and label sizes are not counted in)
Label size	L: 20–280mm   H: 30–140mm
Material Size	Ф20-100mm   H: 40-120mm
Roll Inside Diameter	Ф <b>76mm</b>
Roll Outside Diameter	Max. 0350mm
Machine Size	2000*850*1600mm(L*W*H)
Power Supply	AC220V 50/60Hz 1500W



- Applicable to high-precision whole curved surface, the obverse, reverse sides (double-labeling) and fix-point labeling on rotundities as well as tapered ones from medicine, food, daily use chem-ical and other industries.
- Advanced human-machine touch screen interface which is easy and and convenient to operate, with complete function and abundant online help.
- Unique three-point fix to bottle body, avoiding labeling it on the skew due to the irregular bottom or the bottle body out of plumb when uses a straight line labeling machine, which ensures a precise, artistic and close-knit labeling work.
- Automatic photoelectric detection functions, such as cancelling labeling without objects there, stopping running or raising an alarm without labels to use to avoid omitting or wasting labels.
- Simple and compact machine structure makes it easy to operate and maintain.

### Application



Beverage



Chemical



Health Care



**Daily necessities** 



Food

Specification

Cosmetic

Healt

Model **XT-100** 20-40pcs/min Labeling Speed Labeling Accuracy ±1.0mm(material and label sizes are not counted in) Label size L: 20-300mm | H: 10-140mm Material Size 040-100mm | H: 30-200mm **Roll Inside Diameter 076mm Roll Outside Diameter** Max. 0350mm 2000\*1050\*1600mm(L\*W\*H) Machine Size **Power Supply** AC220V 50/60Hz 1500W



# **XT-100A**

Round Bottle Disc Labeling Machine

### **Feature**

- Applicable to label a whole curved surface or half curved surface on rotundities from medicine, food, agrochemical and other light industries, it can be used solely or connec.
- The running of complete machine is stable and at high speed with the use of imported.
- Amiable and advanced touch human-computer interface which is easy and intuitionistic operate and has complete functions including abundant online help
- The using of world famous accessories ensures the stability and relability of the machine.
- Using of special bottle-distributing mechanism to avoid the materials being scratchedand with which the machine can be adjusted and located quickly to label bottles with anydiameter without replacing accessories.
- Automatic synchronous tracking to conveying, closing of the idler wheel and labelingspeed makes it easy and fast to adjust.
- Automatic sensory test functions, such as cancelling labeling without objects there, stopping running or raising an alarm without labels to use to avoid omitting or wasting labels.

### Application















Food

Beverage



Cosmetic



are

Daily necessities

X1-100A
40-200pcs/min (relate to material and label size)
±1.0mm(material and label sizes are not counted in)
L: 20–280mm   H: 10–140mm
Ф20-100mm   H: 40-200mm
Ф <b>76mm</b>
Max. 0350mm
2000*900*1500mm(L*W*H)
AC220V 50/60Hz 1800W



## XT-2520B

High Velocity Vertical Disc Labeling Machine For Round Bottles

### Feature

- It is suitable for high-precision circular labeling, semicircle labeling and front and back labeling of circular objects in medicine, food, daily chemical and other industries.
- Amiable and advanced touch human-computer interface which is easy and intuitionistic operate and has complete functions including abundant online help
- More stable disc location mechanism, unique three-point fix to bottle body, avoiding labeling it on the skew due to the irregular bottom or the bottle body out of plumb when uses a common vertical labeling machine, which ensures a precise, artistic and close-knit labeling work.
- Speed regulation can be stepless for labelling, conveying, locating turntable as needed.
- The end operation section may be connected with assembly line or material-receivingturntable to collect, sort and pack productions.
- It is more fast, more accuracy, more stable, more smooth and with no crease with theuse of three-point fix turntable to greatly improve packing quality.
- Automatic photoelectric detection functions including cancelling labeling without objects there and stopping running or raising a alarm without labels to use to avoid omitting orwasting labels.

Application



Beverage



Chemical



Cosmetic



**Health Care** 



**Daily necessities** 



Food

Specification

Model	XT-2520B
Labeling Speed	40-150pcs/min (relate to material and label size)
Labeling Accuracy	±0.5mm(material and label sizes are not counted in)
Label size	L: 20–300mm   H: 10–140mm
Material Size	040-80mm   H: 30-200mm
Roll Inside Diameter	076mm
Roll Outside Diameter	Max. 0350mm
Machine Size	2400*1100*1600mm(L*W*H)
Power Supply	AC220V 50/60Hz 1800W



# XT-100C

High Speed Continuous Disc-like Labeling Machine

### Feature

- Its structure is simple and rational and easy to operate.
- It can beadjusted according to standards and features of bottles and labels.
- Well-adapted featuremakes it appropriate for all standards of glass and plastic bottles used for food, medicineand cosmetic.
- Satisfied labeling can be done on bottles or other containers with transparentor non-transparent non-drying sticker labels.

### Application





Chemical











Food

Beverage

Specification

Cosmetic



Daily necessities

Model **XT-100C** Labeling Speed 100-300pcs/min (relate to material and label size) Labeling Accuracy ±1.0mm(material and label sizes are not counted in) Label size L: 20-300mm | H: 20-140mm **Material Size** 040-150mm | H: 40-200mm **Roll Inside Diameter 076mm Roll Outside Diameter** Max. 0350mm Machine Size 2500\*1000\*1800mm(L\*W\*H) **Power Supply** AC220V 50/60Hz 3000W





- Suitable for oral liquid, injection, solid glue, batteries, and small and can't stand diameter circular objects the circumference of a circle and a half circle labeling.
- Advanced affinity man-machine interface system, easy operation, complete function, has the rich online help function.
- Automatic photoelectric detection, it has without label no stick and without label automatic correction or alarm automatic detection function, to prevent leakage and waste.
- Special tilting feeding roller conveyor design, the paste item automatic positioning.
- The machine structure is simple, compact, easy to operation and maintenance.
- The machine adopts famous brand motor drive, the feeding label speed stability, reliability.

### Application





Ham Sausage



**Glue Stick** 

**Health Care** 



**Ball-point Pen** 



**Small battery** 



Test Tube

Model	XT-2610
Labeling Speed	60-200pcs/min (relate to material and label size)
Labeling Accuracy	±1.0mm(material and label sizes are not counted in)
Label size	L: 20–100mm   H: 10–180mm
Material Size	016-22mm   H: 40-90mm
Roll Inside Diameter	Ф <b>76mm</b>
Roll Outside Diameter	Max. 0350mm
Machine Size	1800*8500*1600mm(L*W*H)
Power Supply	AC220V 50/60Hz 1500W





- Applicable to the food, cosmetic, medicine, stationery, and other industries of all kinds of things on the plane labeling or adhesive sticker.
- Wide application range, can meet the product width 30mm ~ 200mm products plane labeling and adhesive sticker, replacing the cladding standard mechanism can satisfy the uneven surface labeling.
- Strong and durable, with three lever adjustment mechanism, make full use of the stability of the triangle, the machine solid and durable; simple adjustment, conversion between the different products become simple, time-saving.
- Intelligent control, automatic photoelectric tracking, have nothing without labeling, without label automatic detection of no standard automatic calibration and label, prevent leakage stickers and label waste.

### Application



Plastic Box



Bag



Carton



Flat Box



**Daily Chemical Products** 



Folder

Model	PM-100
Labeling Speed	40-120pcs/min (relate to material and label size)
Labeling Accuracy	±1.0mm(material and label sizes are not counted in)
Label size	L: 20–300mm   H: 20–140mm
Material Size	L: 20-300mm   W: 20-200mm   H: 15-200mm
Roll Inside Diameter	Ф <b>76mm</b>
Roll Outside Diameter	Max. 0350mm
Machine Size	2000*650*1600mm(L*W*H)
Power Supply	AC220V 50/60Hz 1200W



# **PM-100A**

**Paging Labeling Machine** 

### Feature

- Applicable to automatically separating and labeling pages of unformed paper boxes, instruction books and cards, and it can print codes which are from medicine, food, daily use chemical, etc.
- The vacuum conveyer belt takes materials onto it automatically avoiding material translocation. It can separate pages stably and accurately.
- The whole machine adopts mature PLC control system to ensure the stable running inhigh speed.
- ۲ Schistose material with any diameter can be separated and labeled automatically afteradjusting and locating fast without changing accessories with the use of popular typepaging separating installation.
- Operation is simple, practical and efficient with the use of touch screen for operationsystem.
- Speed regulation can be adjusted for labeling, conveying, paging separating as needed.
- Labeling is performed smoothly with no creases with the use of elastic cotton idler wheel.
- Automatic photoelectric detection functions including cancelling labeling without objects there and stopping running or raising an alarm without labels to use to avoid omitting orwasting labels.
- **Application**





Card/Mark







Fabric Bag



Foil Bag

Plastic Bag



**Food Bag** 

Unforming paper box

Model	PM-100A
Labeling Speed	40-150pcs/min (relate to material and label size)
Labeling Accuracy	±1.0mm(material and label sizes are not counted in)
Label size	L: 20–200mm   H: 10–140mm
Material Size	L: 60-300mm   W: 40-200mm   H: 0.3-2mm
Roll Inside Diameter	Ф <b>76mm</b>
Roll Outside Diameter	Max. 0350mm
Machine Size	2900*800*1600mm(L*W*H)
Power Supply	AC220V 50/60Hz1500W





- Applicable to label single flank or double-flank round, square, flat bottles and others of the same kind used to package medicine, food, daily use chemical and other light.
- Advanced touch human-computer interface which is easy and intuitionistic to operate and has complete functions including abundant on line help.
- Fast to adjust and locate without changing accessory to meet the demands of any shapes of bottles with the use of a universal bottle-distributing mechanism; Materialsare symmetrical about the center with the use of chain- correction devices on double sides.
- Special elastic pressure equipment ensures materials stable.
- Automatic photoelectric detection functions, such as cancelling labeling withoutv objects there, stopping running or raising an alarm without labels to use to avoid omitting.
- Adjust with a stepless speed regulation according to the demands of labeling speed.
- Simple and compact machine construction that is easy to operate and maintain.

### Application













Beverage

Chemical

Cosmetic

Health Care

**Daily necessities** 

Food

Model	XT-3510
Labeling Speed	10-200pcs/min (relate to material and label size)
Labeling Accuracy	±1.0mm(material and label sizes are not counted in)
Label size	L: 20–300mm   H: 10–180mm
Material Size	L: 20–300mm   W: 25–100mm   H: 40–300mm
Roll Inside Diameter	076mm
Roll Outside Diameter	Max. 0350mm
Machine Size	2800*1700*1600mm(L*W*H)
Power Supply	AC220V 50/60Hz 2200W



# <section-header>

### Feature

- Applicable to the pharmaceutical, food, cosmetic and other light industrial products such as oval, square, flat bottles on the single and double sides labeling.
- The man-machine interface system is advanced and compatible, easy operation, complete functions, has a wealth of online help function.
- The bottle dividing device shaped general, any diameter of the bottle without replacement parts, rapid positioning adjustment; bilateral chain correction device ensure the material on the neutral.
- Special elastic pressing equipment ensure seeding materials stability.
- Automatic optical inspection, have nothing items come without labeling, and without label automatic correction or alarm and automatic detection function, to prevent leakage and waste.
- Labeling speed, conveyor speed, sub-bottle speed stepless speed, adjust as needed.
- The machine has the advantages of simple structure, compact structure, convenient operation and maintenance.

### Application





Chemical



Cosmetic



Health Care

展雷灵颗粒



**Daily necessities** 




Food

Pharmaceutical

Model	XT-4510
Labeling Speed	10–100pcs/min (relate to material and label size)
Labeling Accuracy	±1.0mm(material and label sizes are not counted in)
Label size	L: 10-100mm   H: 10-140mm
Material Size	L: 40–200mm   W: 25–210mm   H: 20–200mm
Roll Inside Diameter	Ф76mm
Roll Outside Diameter	Max. 0350mm
Machine Size	2400*1700*1600mm(L*W*H)
Power Supply	AC220V 50/60Hz 1500W



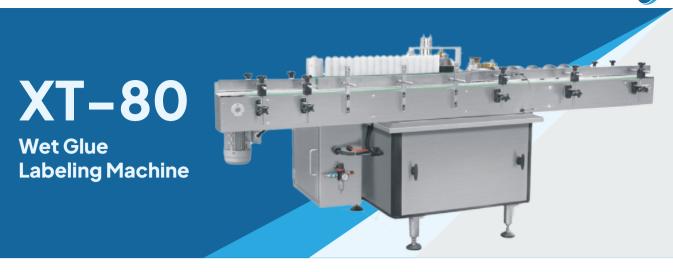

- Adopts mechanical transmission in whole, transmission parts equipped with closed lubricating-oil-providing tank turn smoothly and deftly with little faults and noise.
- Load of motor is low, panel and plate of turntable are made from stainless steel, which is durable, clean and rustless and easy to maintain.
- Can be used alone, as well as designed to be connected with assembly line.
- It covers little room and can be moved at will to adjust room distribution at workplace.
- Appropriate to label round containers made for chemical, medicine, food, beverage and other industries.
- It can be equipped with printing equipment according to customer's demands.
- This machine is single side glue labeling machine, it is mainly composed of labeling head, label delivery mechanism, bottle delivery mechanism, gluing, labeling, etc. This machine adopts touch screen and PLC control system, pneumatic press the bottle and labeling, high automation and easy operation, the labeling position is kept the same with beautiful labeling outlook, using normal label paper, to greatly save time and cost. It is widely used in wine, pharmaceutical, food and chemical industry, etc.

### Application













Beverage



Cosmetic

**Health** Care

**Daily necessities** 

Food

Specification

Model	XT-80
Labeling Speed	60-100pcs/min (relate to material and label size)
Labeling Accuracy	±1.0mm(material and label sizes are not counted in)
Label size	L: 50–130mm   H: 40–110mm
Material Size	Ф <b>25-100mm</b>
Adhesive	Polyvinyl acetate emulsion
Working Pressure	0.4-0.6MPa
Machine Size	2400*950*1000mm(L*W*H)
Power Supply	AC220/380V1500W



## **XT-80A**

Double Side Wet Glue Labeling Machine

### **Feature**

- Adopts mechanical transmission in whole, transmission parts equipped with closed lubricating-oil-providing tank turn smoothly and deftly with little faults and noise.
- Load of motor is low, panel and plate of turntable are made from stainless steel, which is durable, clean and rustless and easy to maintain.
- Can be used alone, as well as designed to be connected with assembly line.
- It covers little room and can be moved at will to adjust room distribution at workplace.
- Appropriate to label round containers made for chemical, medicine, food, beverage and other industries.
- It can be equipped with printing equipment according to customer's demands.
- This machine is double side glue labeling machine, it is mainly composed of labeling head, label delivery mechanism, bottle delivery mechanism, gluing, labeling, etc. This machine adopts touch screen and PLC control system, pneumatic press the bottle and labeling, high automation and easy operation, the labeling position is kept the same with beautiful labeling outlook, using normal label paper, to greatly save time and cost. It is widely used in wine, pharmaceutical, food and chemical industry, etc.

### Application





Chemical







**Health Care** 



**Daily necessities** 



Food

Beverage

Model	XT-80A
Labeling Speed	80-100pcs/min (relate to material and label size)
Labeling Accuracy	±1.0mm(material and label sizes are not counted in)
Label size	L: 50–130mm   H: 40–110mm
Material Size	Ф <b>40–100mm</b>
Adhesive	Polyvinyl acetate emulsion
Working Pressure	0.4-0.6MPa
Machine Size	2400*1050*1100mm(L*W*H)
Power Supply	AC220/380V 1500W



