




Innovation



High Efficiency

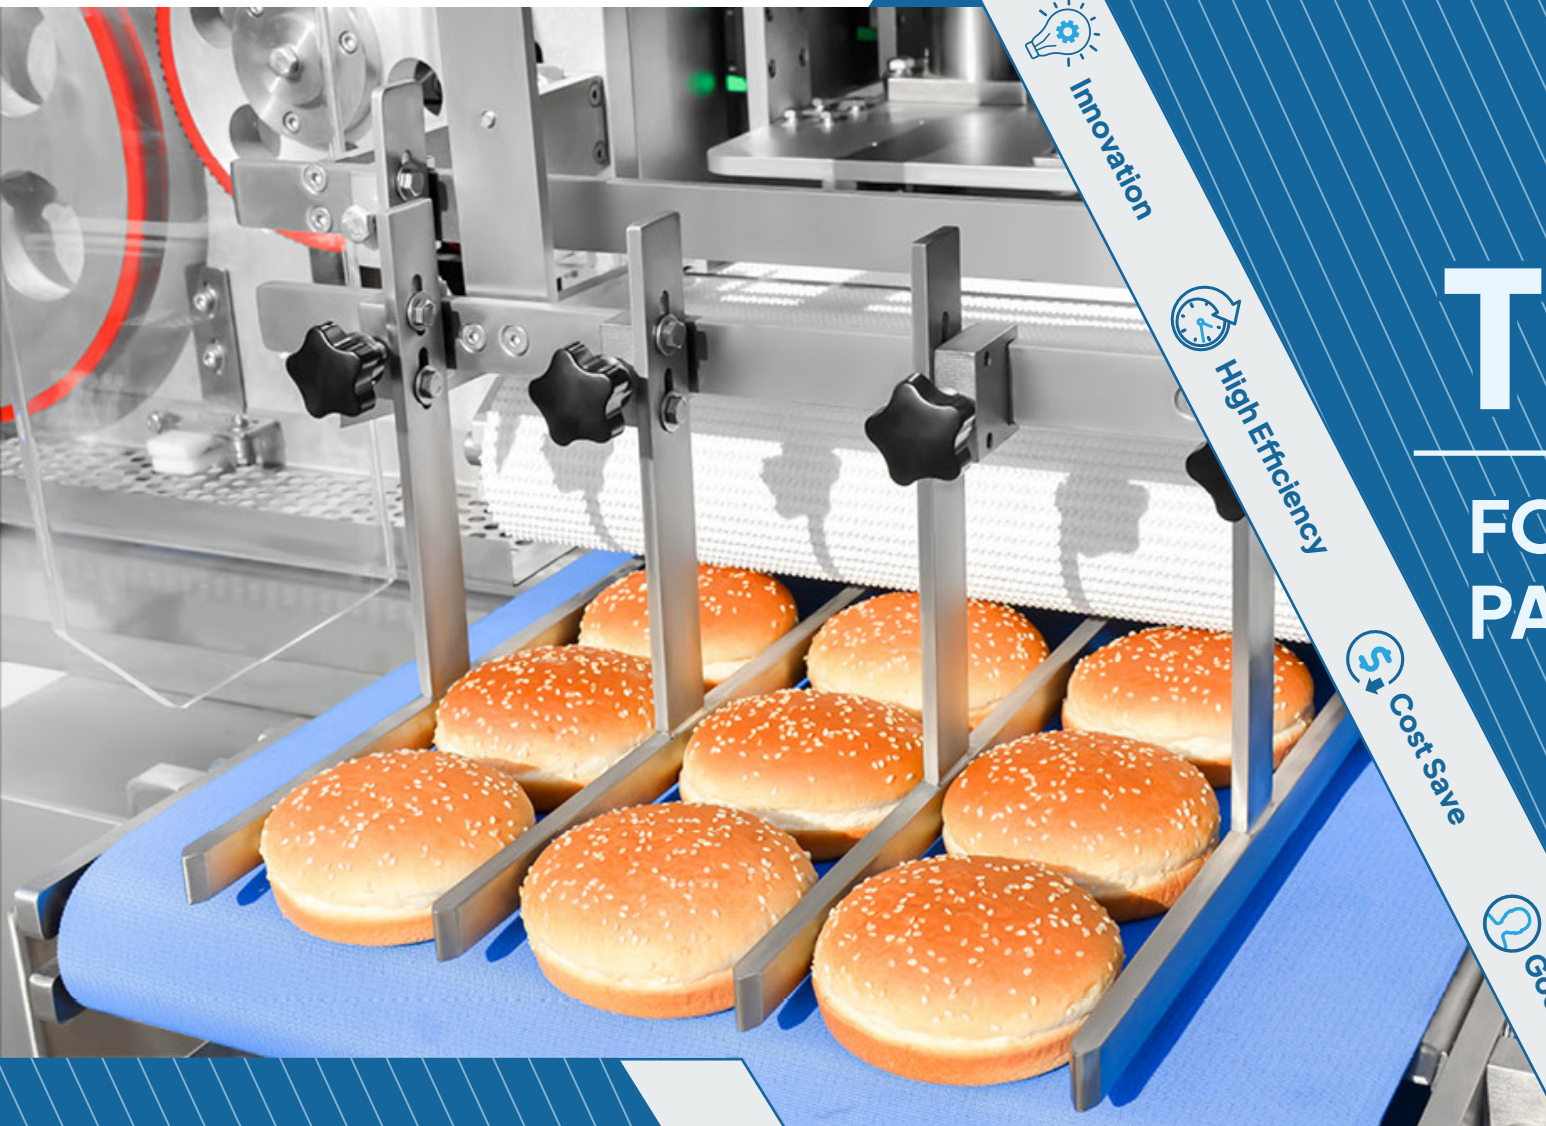

Cost Save



Good Service

TTPACK

FOCUS ON PILLOW PACKING MACHINE

TTPACK TRADING & TECHNICAL SERVICES COMPANY LIMITED

Sales: 0869 833 002 Hotline: 0334 487 184 Email: marketing@ttpack.com.vn

● NOODLE PACKING SOLUTION

INSTANT NOODLE SINGLE PACK

INSTANT NOODLE MULTI PACK

BOWL NOODLE AND CUP NOODLE SHRINK PACK

RICE NOODLE MULTI PACK

● BURGER PACKING SOLUTION

BURGER SINGLE PACK

BURGER MULTI PACK

● BISCUIT PACKING SOLUTION

BISCUIT PILLOW PACK

BISCUIT ON-EDGE PACK

● OTHER BAKERY PACKING SOLUTION

OTHER BAKERY SINGLE PACK

OTHER BAKERY MULTI PACK

SLICED BREAD PACKING MACHINE

● MORE SERIES

TORTILLA PACKING MACHINE

FROZEN FOOD PACKING MACHINE

MULTI-BAG SNACKS PACKING MACHINE

FRESH VEGETABLE PACKING MACHINE

SPAGHETTI PACKING MACHINE

● APPENDIX

OPTIONAL DEVICES

SAMPLES

MODELS


TTPACK TRADING & TECHNICAL SERVICES COMPANY LIMITED

Sales: 0869 833 002 Hotline: 0334 487 184 Email: marketing@ttpack.com.vn

CATALOGUE

BOSS450/120-S

INSTAND NOODLE SINGLE PACK

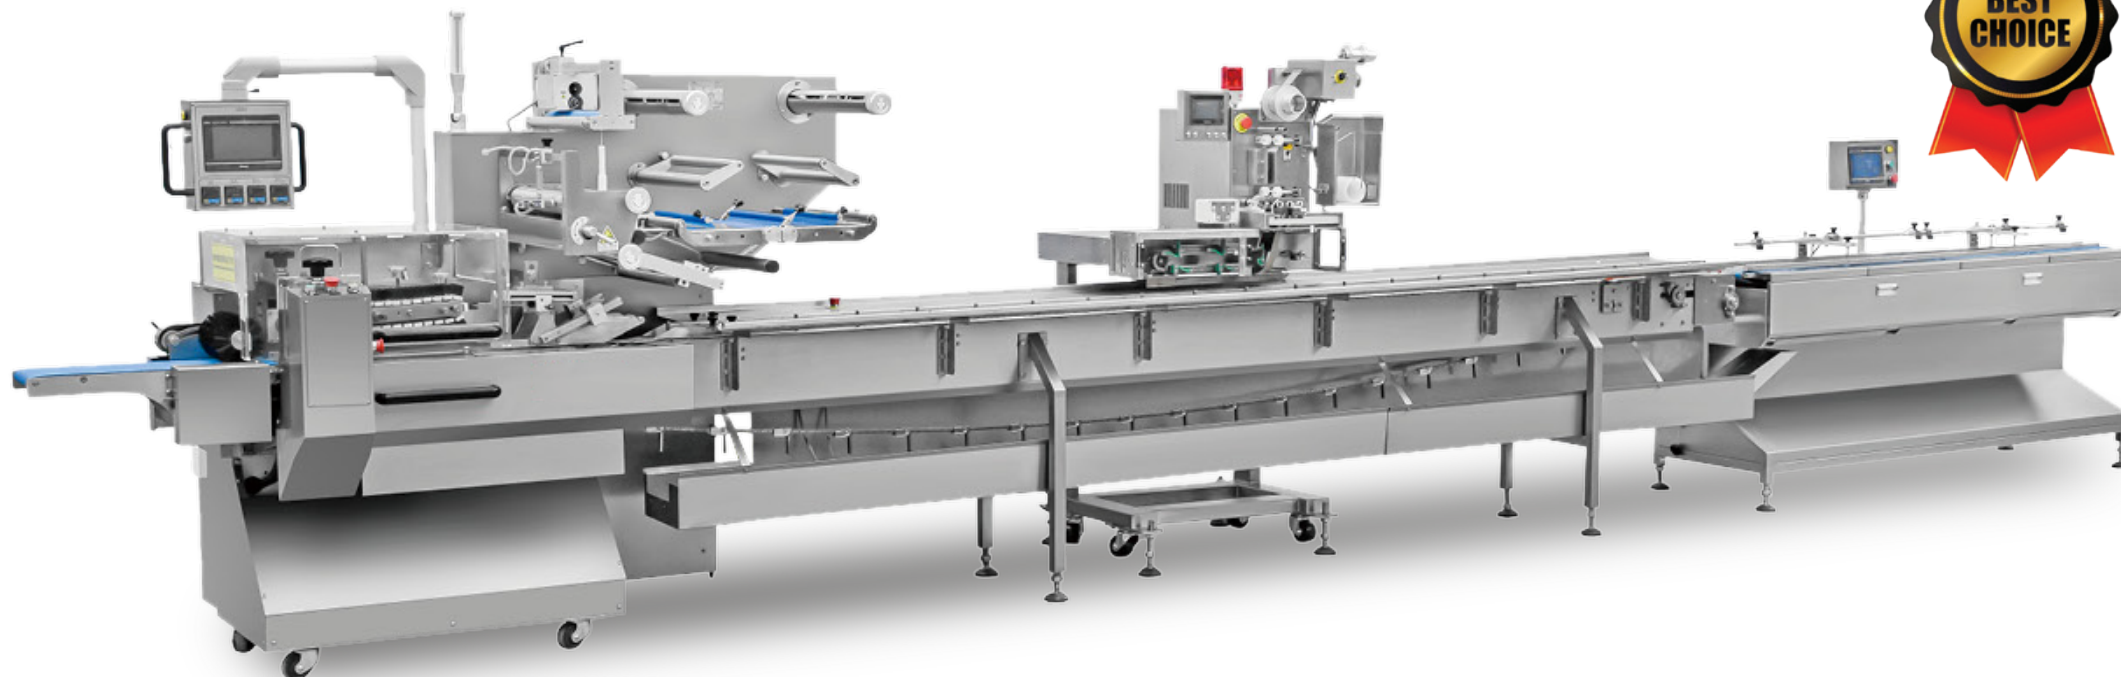

● Main Feature

- High speed
- Stable
- Ajustable bag former
- Multiple product memories, etc.

● Optional Device

- Automatic Film Splicer
- Auto Dispenser
- Auto Pouch Layer
- Four-stage Auto Feeder
- Date Printer




Model	BOSS450/120-S
Film Width	Max.450 (mm)
Packing Speed	20-240 (Packs/min)
Package Length	90-370 (mm)
Product Width	20-140 (mm)
Product Height	5-60 (mm)
Power and Voltage	5KW; 220V 50HZ
Dimension L*W*H	4500*970*1700 (mm) (can also be customized)
Weight	880 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSW720

INSTAND NOODLE MULTI PACK

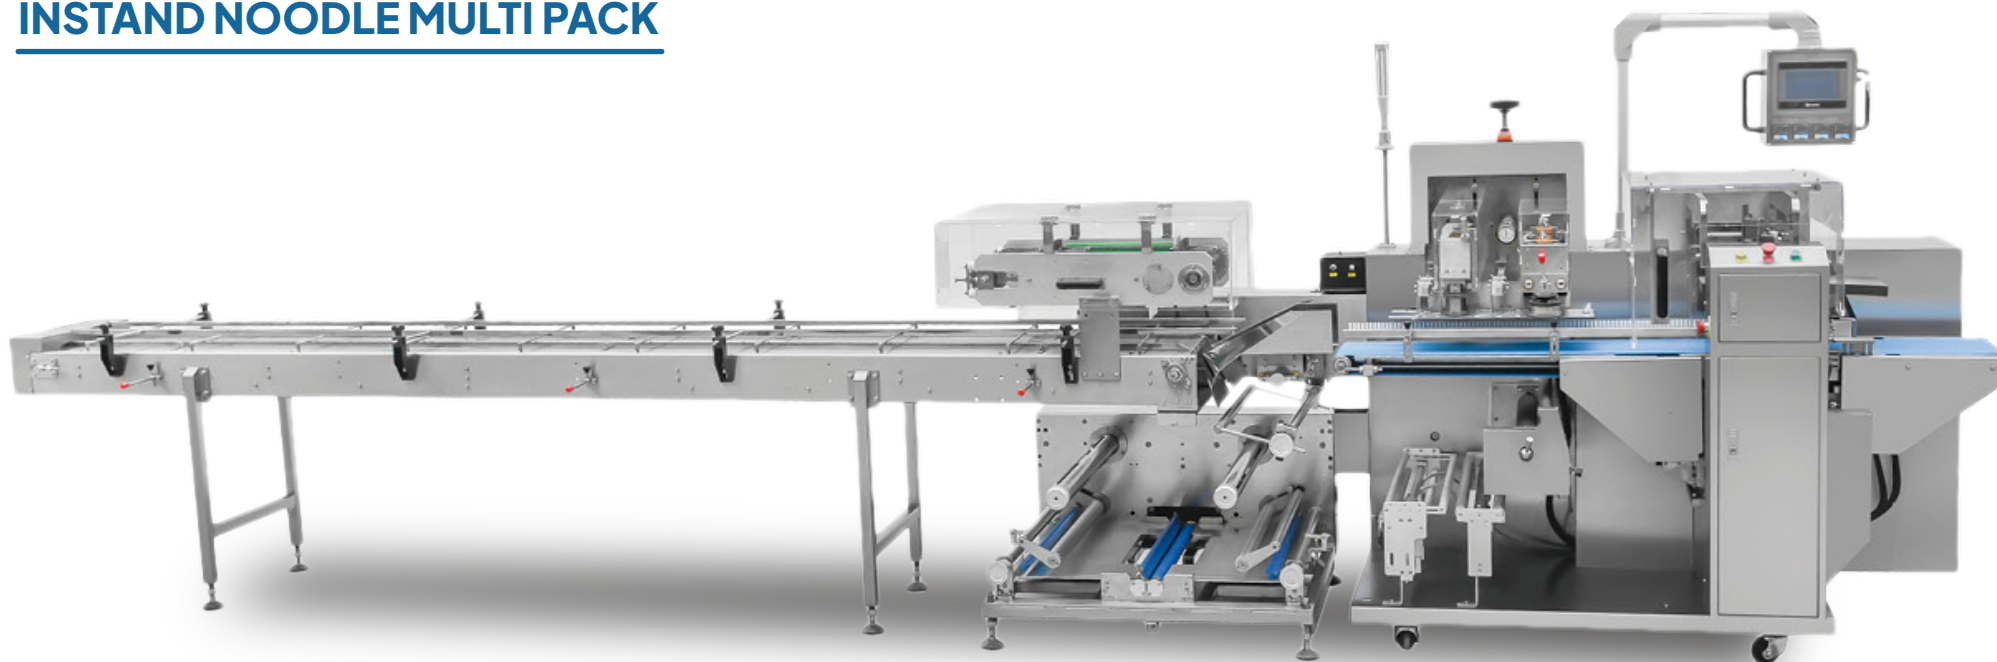

● Main Feature

- Film from below
- Box motion end sealer
- Include pushing device
- Optional punching type
- Adjustable bag former
- Multiple product memories, etc.

● Optional Device

- Automatic Film Splicer
- Hole Puncher
- Date Printer



Model	BOSW720
Film Width	Max.720 (mm)
Packing Speed	20-100 (Packs/min)
Package Length	180-600 (mm)
Product Width	40-320 (mm)
Product Height	5-160 (mm)
Power and Voltage	6.5KW; 220V 50HZ
Dimension L*W*H	6300*1400*1900 (mm) (can also be customized)
Weight	1500 (kg)
Air Capacity	0.6Mpa, 1.5m ³ /min

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSD590/195

BOWL NOODLE AND CUP NOODLE SHRINK PACK



● Main Feature

- High speed
- Side-cut or electrostatic center sealer available
- Date printer available, etc.




Model	BOSD590/195
Film Width	Max.590 (mm)
Packing Speed	20-180 (Packs/min)
Package Length	180-600 (mm)
Product Width	40-220 (mm)
Product Height	50-125 (mm)
Power and Voltage	4KW; 220V 50HZ
Dimension L*W*H	5200*1100*1700 (mm) (can also be customized)
Weight	1100 (kg)

Shrink Tunnel	
Power and Voltage	19KW; 380V 50HZ
Dimension L*W*H	2900*650*1700 (mm) (can also be customized)
Weight	400 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSW590/120-PF

RICE NOODLE MULTI PACK

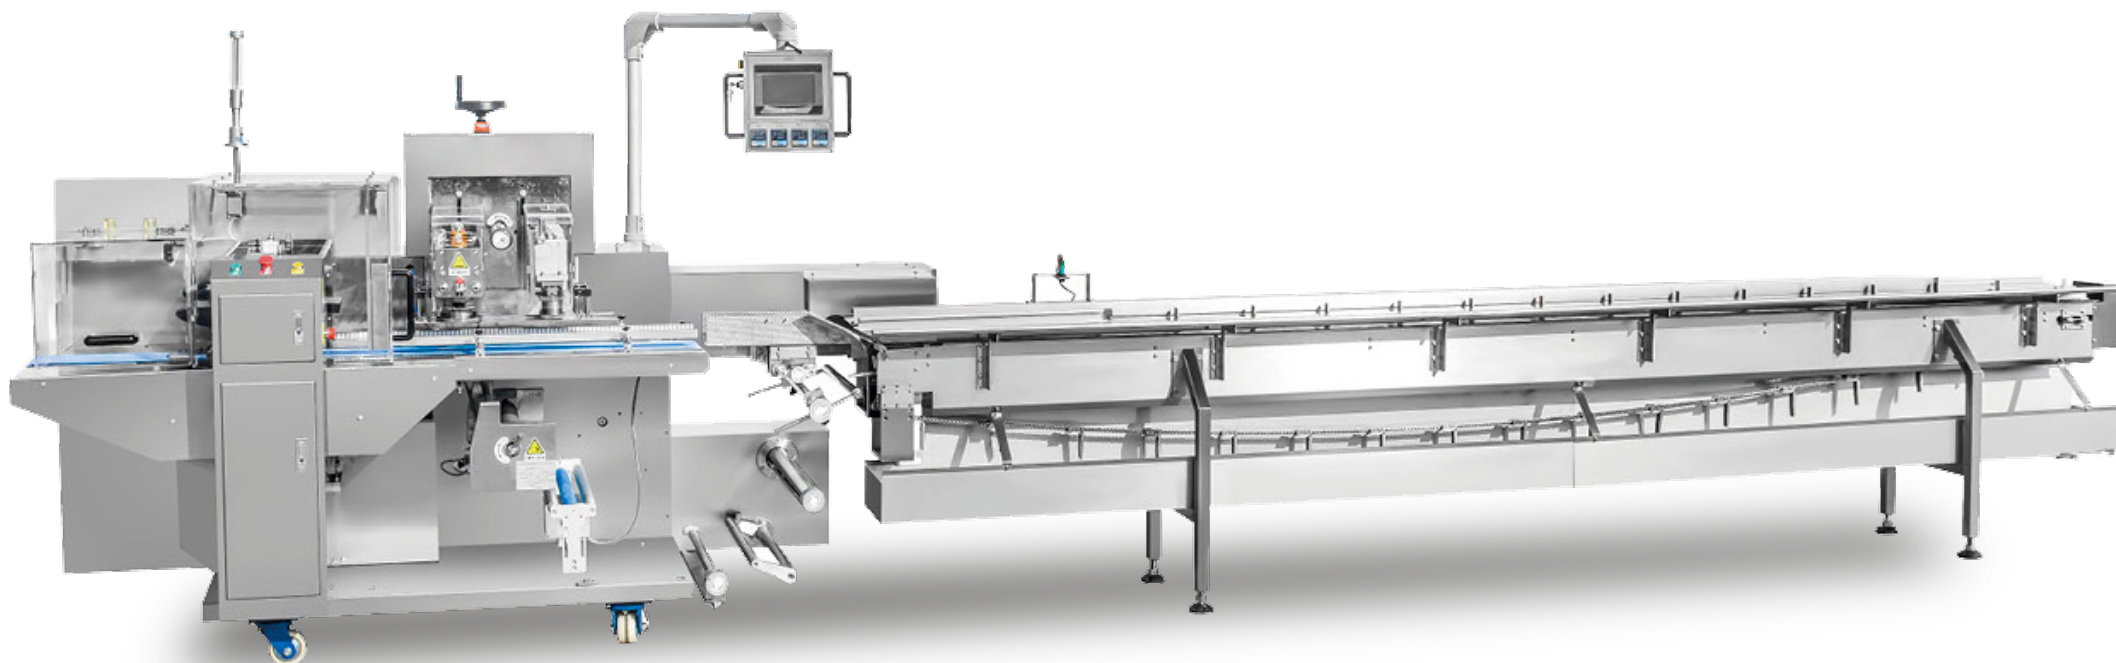

● Main Feature

- Customized conveyor
- Adjustable bag former
- Multiple product memories, etc.




Model	BOSW590/120-PF
Film Width	Max.590 (mm)
Packing Speed	20-100 (Packs/min)
Package Length	140-600 (mm)
Product Width	50-220(mm)
Product Height	5-120(mm)
Power and Voltage	5.7KW; 220V 50HZ
Dimension L*W*H	6300*1220*1800 (mm) (can also be customized)
Weight	1450 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSS450/132-S

BURGER SINGLE PACK

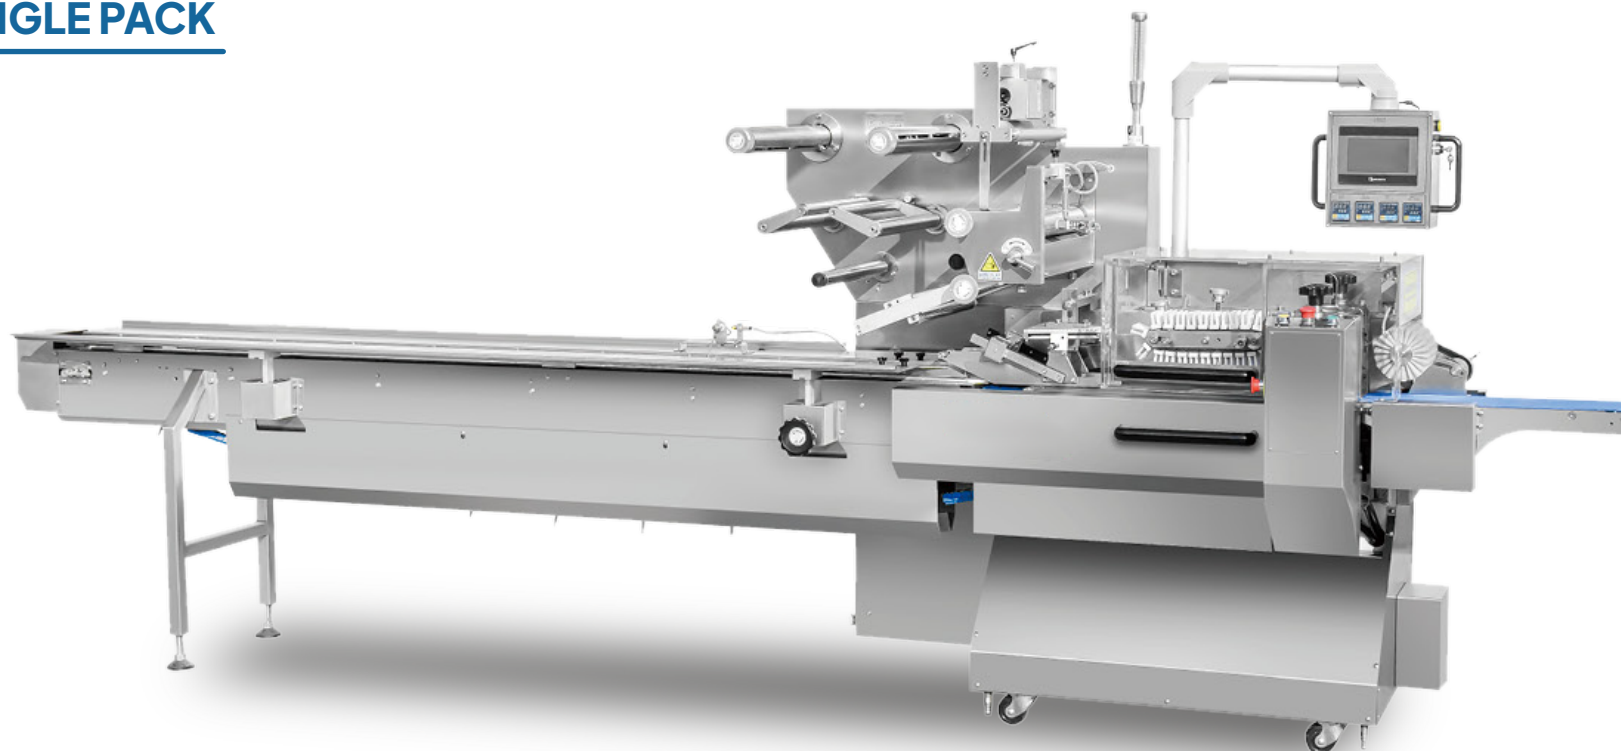

● Main Feature

- High speed
- Ajustable bag former
- Multiple product memories, etc.

● Optional Device

- Single-blade Slicer
- Auto Dispenser
- Double-blade Slicer
- Nitrogen Filling Device
- Auto Feeding System
- Date Printer




Model	BOSS450/132-S
Film Width	Max.450 (mm)
Packing Speed	20-160 (Packs/min)
Package Length	95-450 (mm)
Product Width	20-140 (mm)
Product Height	5-70 (mm)
Power and Voltage	5KW; 220V 50HZ
Dimension L*W*H	4500*970*1700 (mm) (can also be customized)
Weight	880 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSS590/150-S

BURGER MULTI PACK

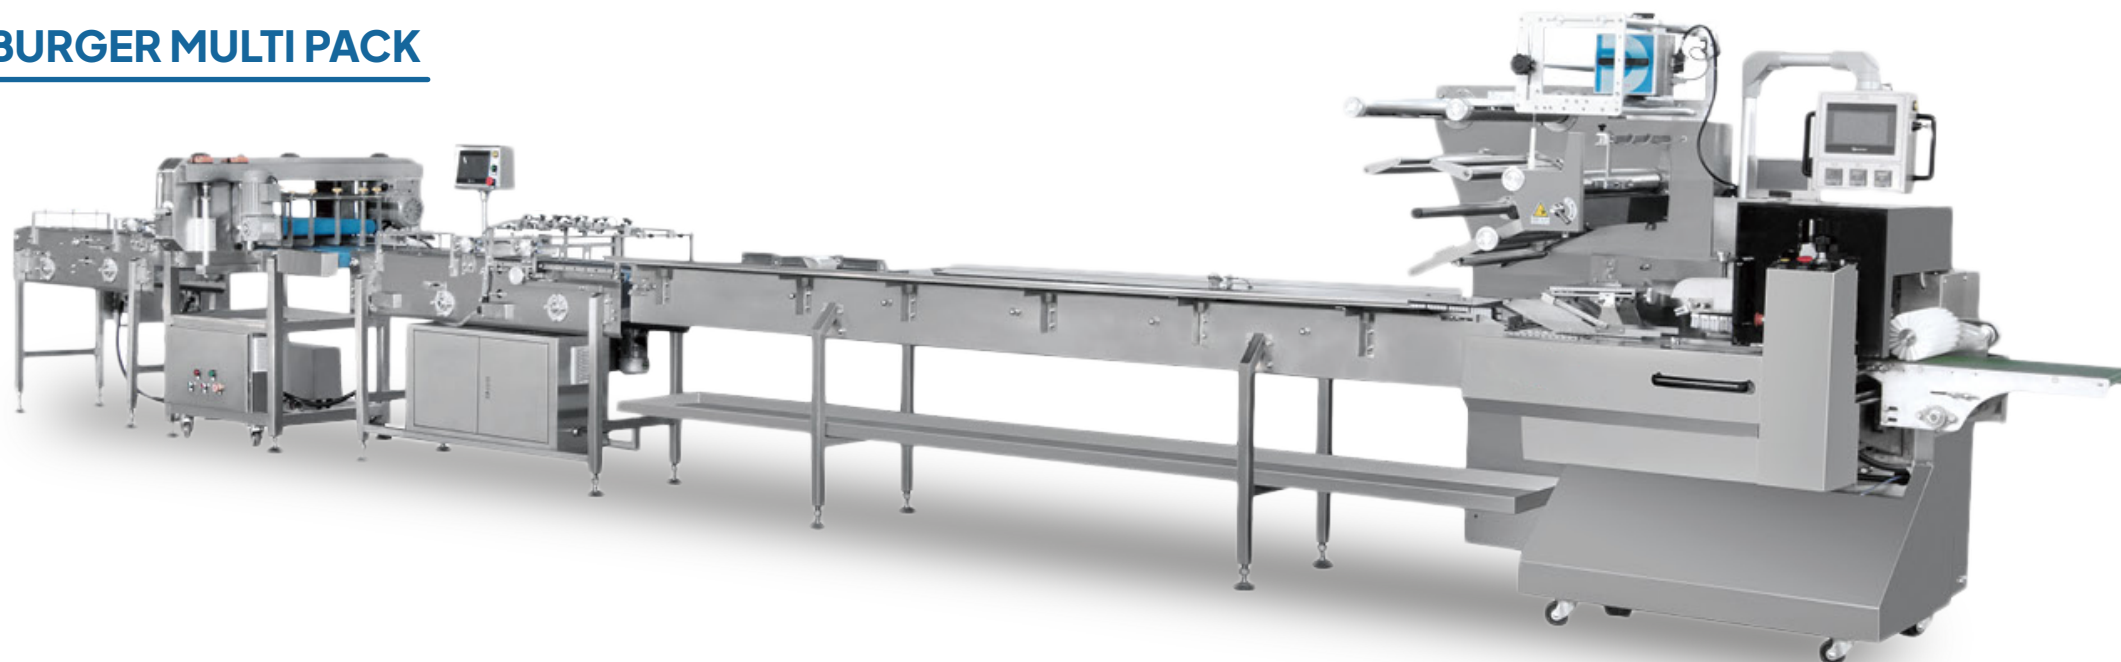

● Fully Auto Burger Packing Line

- Auto feeding System
- Single-blade Slicer
- Auto Arrangement Device
- Packing Machine




Model	BOSS590/150-S
Film Width	Max.590 (mm)
Packing Speed	20-130 (Packs/min)
Package Length	100-450 (mm)
Product Width	40-220 (mm)
Product Height	35-75 (mm)
Power and Voltage	5.5KW; 220V 50HZ
Dimension L*W*H	4500*1110*1700 (mm) (can also be customized)
Weight	1050 (kg)

Auto feeder	
Power and Voltage	2KW; 220V 50HZ
Dimension L*W*H	4200*1200*1200 (mm) (can also be customized)
Weight	1200 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSS450/120-X

BISCUIT PILLOW PACK

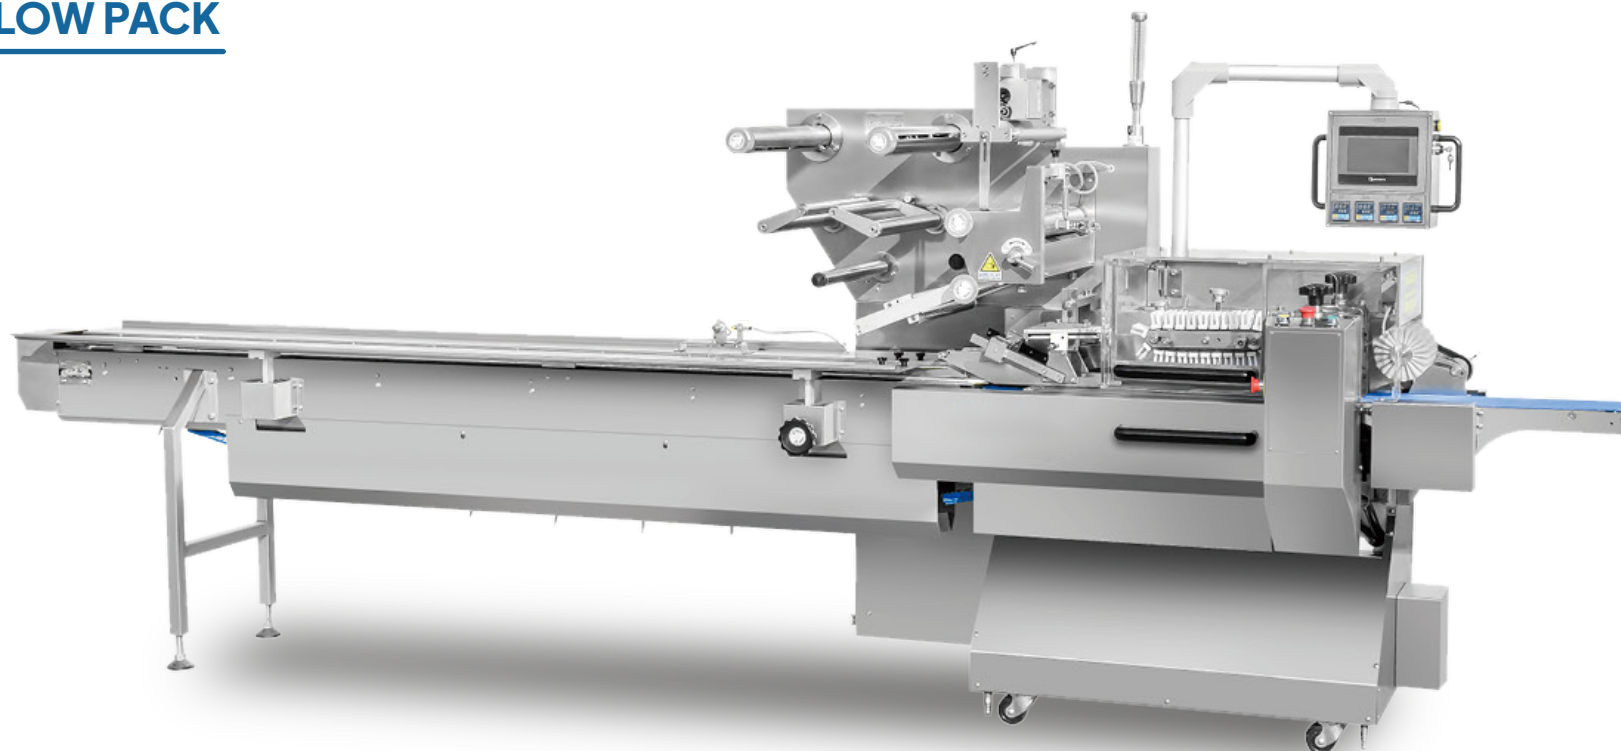

● Main Feature

- High speed
- Stable
- Ajustable bag former
- Multiple product memories, etc.

● Optional Device

- Biscuit Sandwich Machine
- Auto Feeding System
- Date Printer




Model	BOSS450/120-X
Film Width	Max. 450 (mm)
Packing Speed	20-360 (Packs/min)
Package Length	80-340 (mm)
Product Width	20-140 (mm)
Product Height	5-40 (mm)
Power and Voltage	5KW; 220V 50HZ
Dimension L*W*H	4500*970*1700 (mm) (can also be customized)
Weight	880 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSS450/150-WT

BISCUIT ON-EDGE PACK

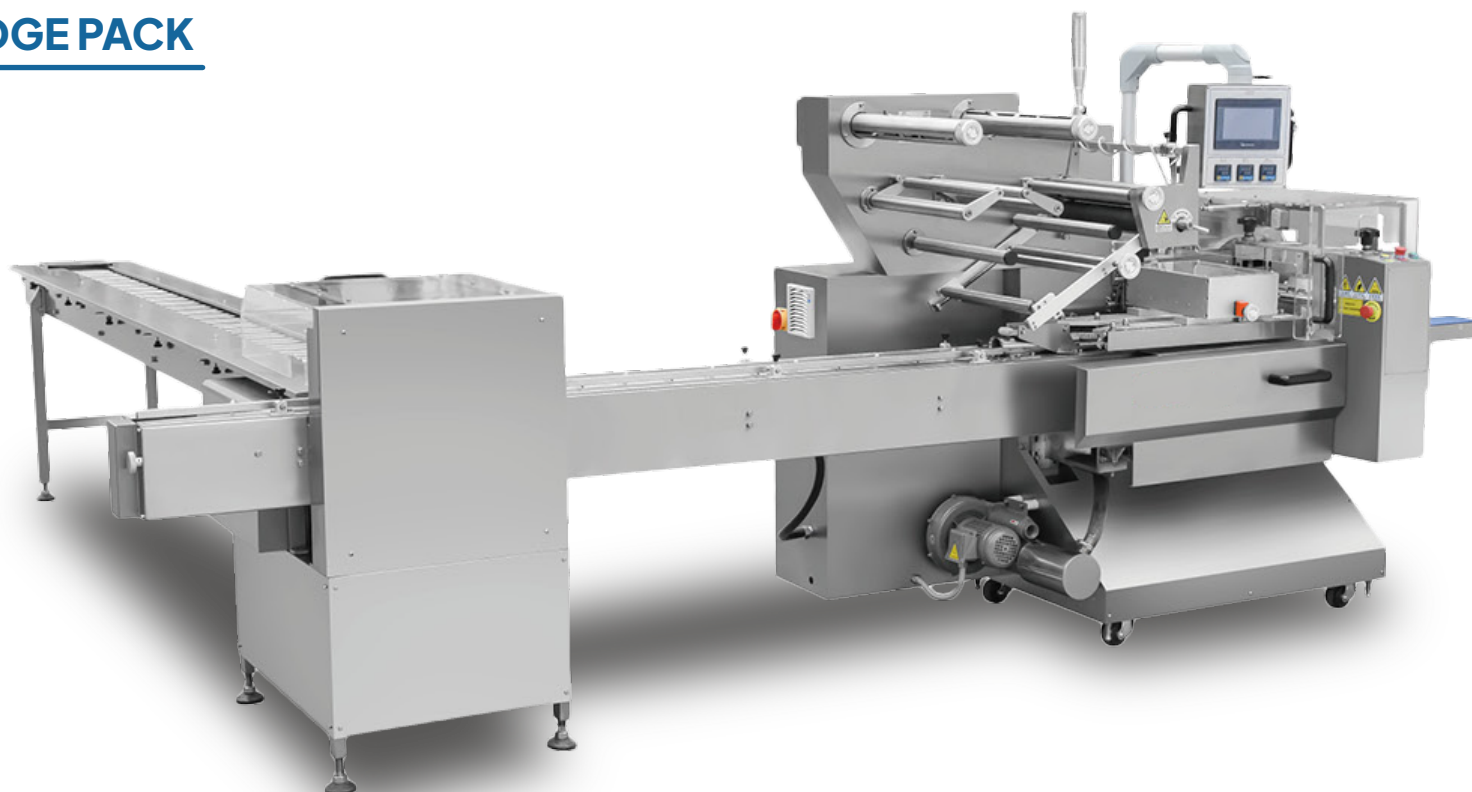

● Application

- Suitable for packing many kinds of trayless biscuits, and the bag former can be customized.



Model	BOSS450/150-WT
Film Width	Max. 450 (mm)
Packing Speed	30-110 (Packs/min)
Package Length	130-400(mm)
Product Width	35-120(mm)
Product Height	30-85(mm)
Power and Voltage	6.5KW; 220V 50HZ
Dimension L*W*H	5200*1100*1800 4100*700*1150 (mm)
Weight	1500 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSS450/132-S

OTHER BAKERY SINGLE PACK



● Fully Auto Packing Line

- Conveyor
- Transition Device
- Four-stage Auto Feeder
- Packing Machine

● Optional Device

- Automatic Film Splicer
- Nitrogen Filling Device
- Auto Feeding System
- Date Printer




Model	BOSS450/132-S
Film Width	Max. 450 (mm)
Packing Speed	20-160 (Packs/min)
Package Length	95-450 (mm)
Product Width	20-140 (mm)
Product Height	5-70 (mm)
Power and Voltage	5KW; 220V 50HZ
Dimension L*W*H	4500*970*1700 (mm) (can also be customized)
Weight	880 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSW720

OTHER BAKERY MULTI PACK

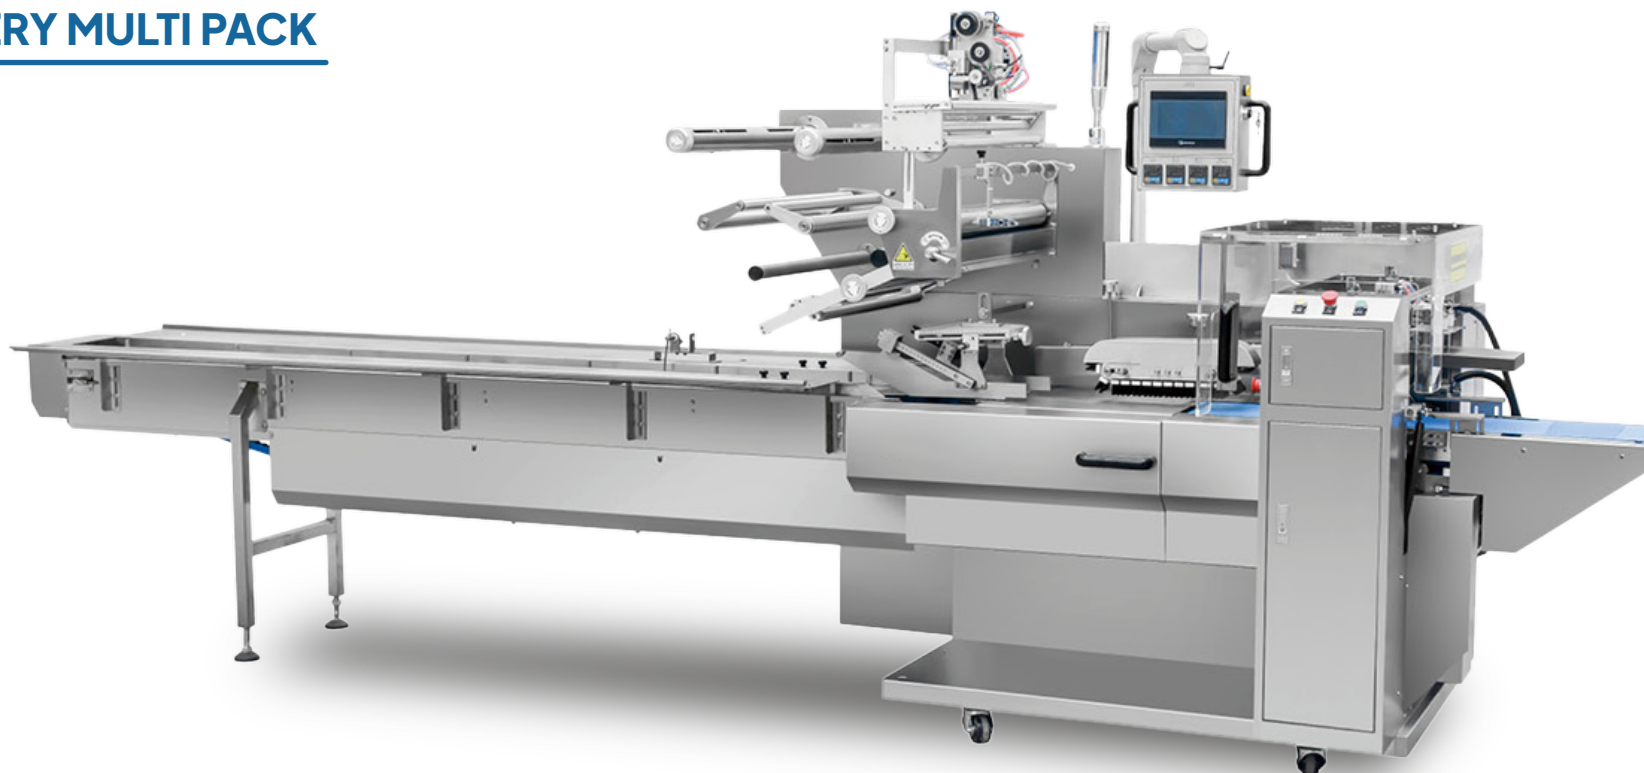

● Main Feature

- Film from above
- Box motion end sealer
- Multiple product memories
- No product, no pack, etc.

● Optional Device

- Automatic Film Splicer
- Auto Feeding System
- Date Printer




Model	BOSW720
Film Width	Max.720 (mm)
Packing Speed	20-100 (Packs/min)
Package Length	180-600 (mm)
Product Width	40-320 (mm)
Product Height	5-160 (mm)
Power and Voltage	6.5KW; 220V 50HZ
Dimension L*W*H	6300*1400*1900 (mm) (can also be customized)
Weight	1500 (kg)
Air Capacity	0.6Mpa, 1.5m ³ /min

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSW590/160-WT

SLICED BREAD PACKING MACHINE

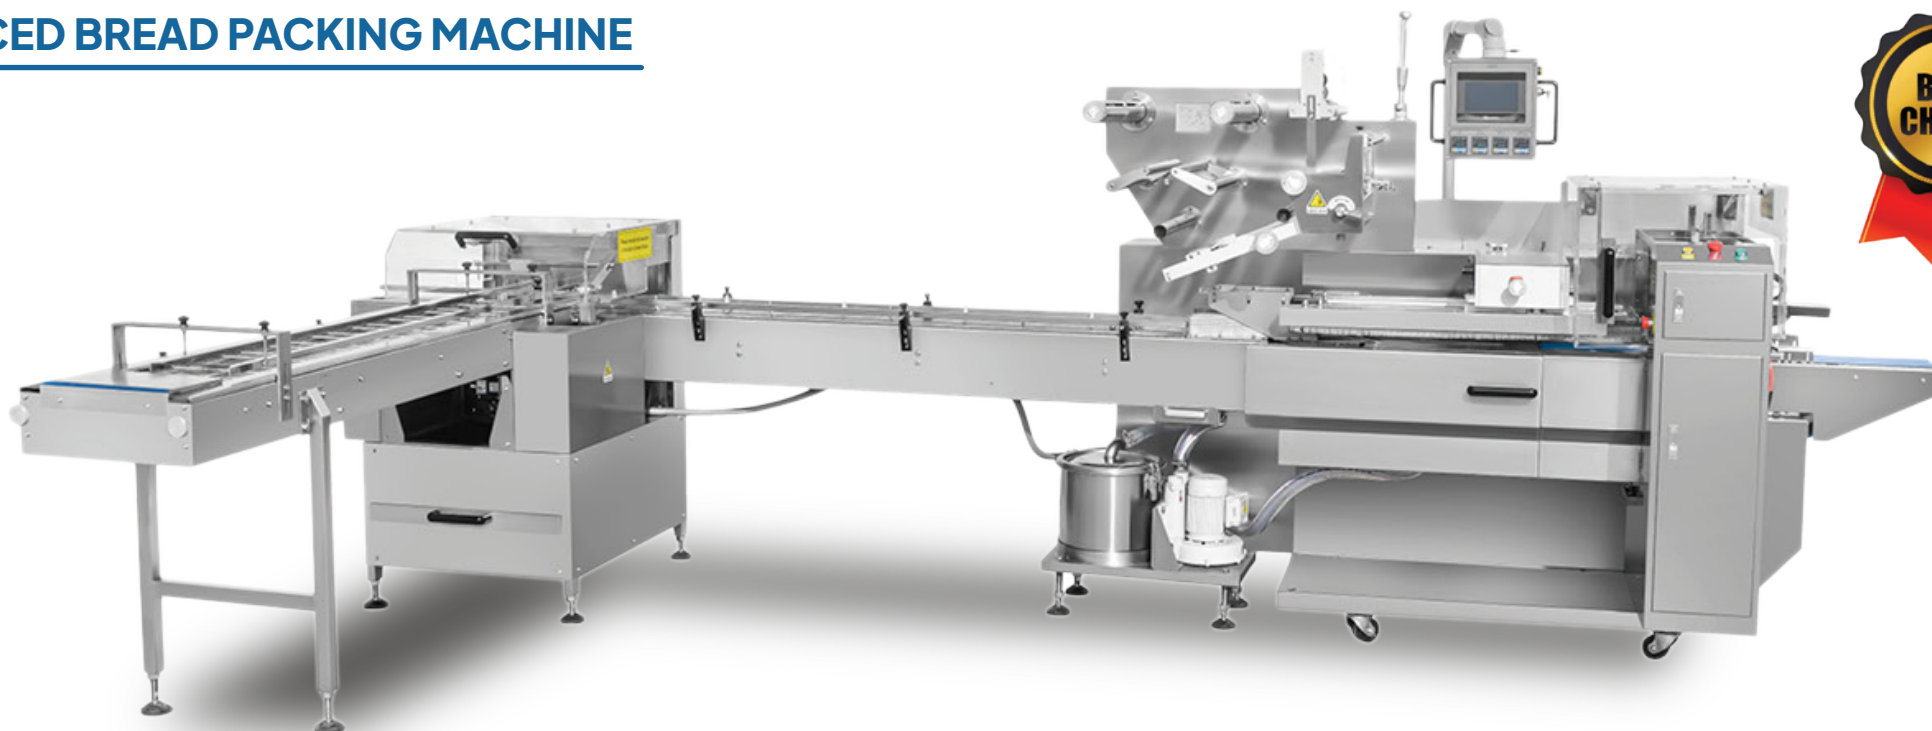

● Application

- Suitable for sliced bread, the machine will be customized according to the products.




Model	BOSW590/160-WT
Film Width	Max.590 (mm)
Packing Speed	20-50 (Packs/min)
Package Length	200-500 (mm)
Product Width	100-150(mm)
Product Height	50-150(mm)
Power and Voltage	6.5KW; 220V 50HZ
Dimension L*W*H	5070*1250*1650(mm) 4300*780*1160 (mm)
Weight	1450 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSW820/160-SF

TORTILLA PACKING MACHINE

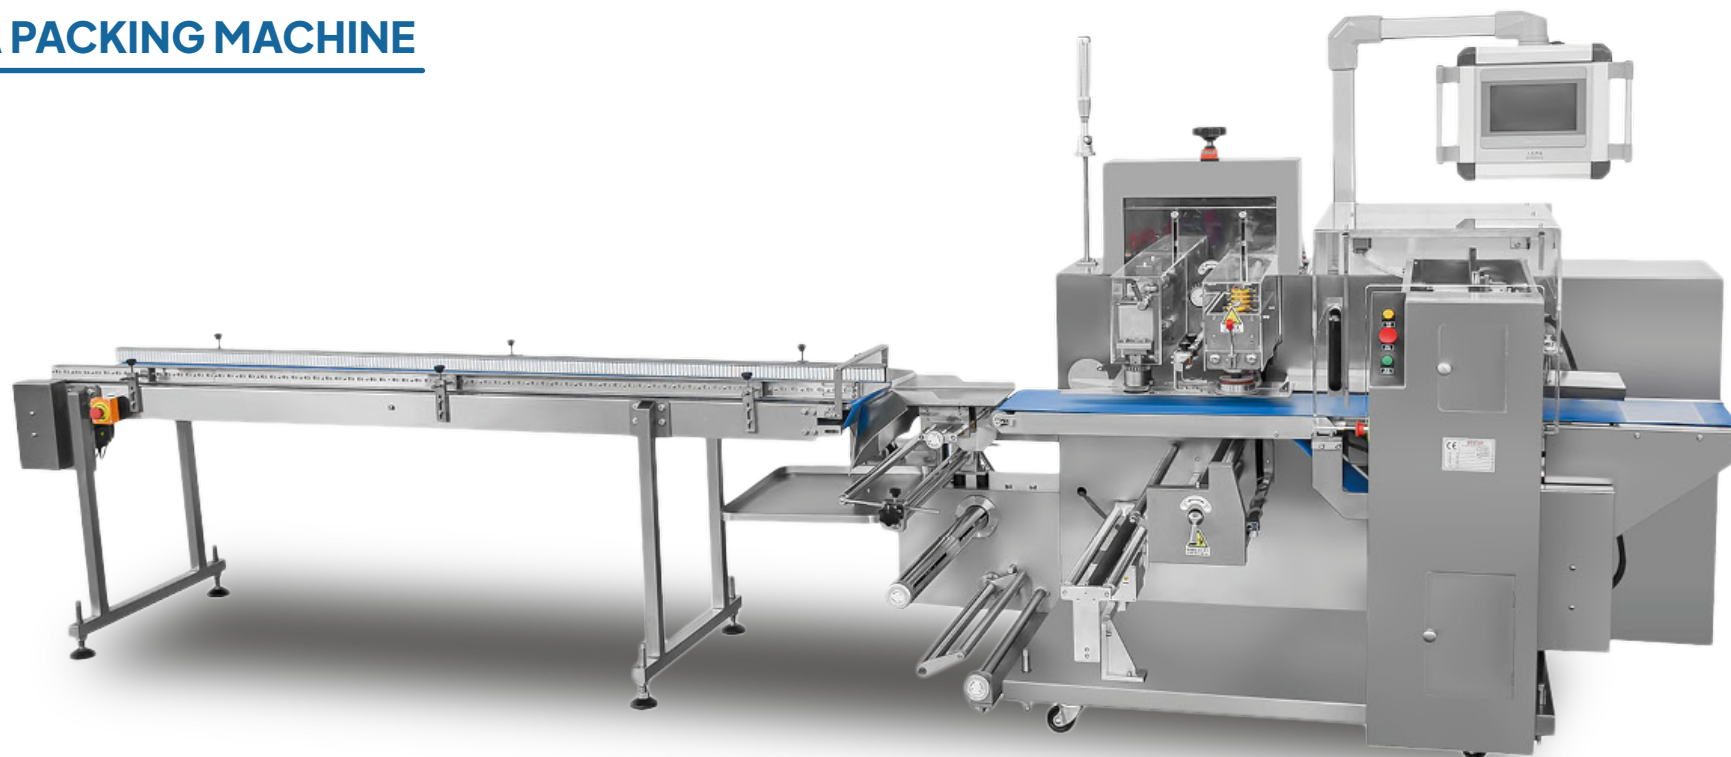

● Main Feature

- Film from below
- Box motion end sealer
- Multiple product memories
- No product, no pack
- Belt conveyor, etc.

● Optional Device

- Automatic Film Splicer
- Auto Dispenser
- Date Printer



Model	BOSW820/160-SF
Film Width	Max.820 (mm)
Packing Speed	5-80 (Packs/min)
Package Length	200-9999 (mm)
Product Width	40-350 (mm)
Product Height	5-160 (mm)
Power and Voltage	6.5KW; 220V 50HZ
Dimension L*W*H	4900*1420*1840 (mm) (can also be customized)
Weight	1500 (kg)
Air Capacity	0.6Mpa, 1.5m³/min

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSS590/165-S

FROZEN FOOD PACKING MACHINE



● Application

- Frozen food multipack with/without tray
- packaging, such as dumplings, spring roll, pizza, steamed bun and so on.

● Optional Model

- BOSW590
- BOSW720 (box motion end sealer)

● Optional Device

- Auto Feeding System
- Date printer



Model	BOSS590/165-S
Film Width	Max.590 (mm)
Packing Speed	20-130 (Packs/min)
Package Length	150-500 (mm)
Product Width	40-220 (mm)
Product Height	50-90(mm)
Power and Voltage	5.5KW; 220V 50HZ
Dimension L*W*H	4500*1110*1700 (mm) (can also be customized)
Weight	1050 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSM720/165-S

MULTI-BAG SNACKS PACKING MACHINE



● Application

- Suitable for multi-bag snacks, such as biscuits, bread, instant noodles, etc.

● Optional Model

- BOSM590/150
- BOSM450/132...

● Optional Device

- Date Printer
- Hole Puncher...




Model	BOSM720/165-S
Film Width	Max.720 (mm)
Packing Speed	20-100 (Packs/min)
Package Length	200-600 (mm)
Product Width	40-280 (mm)
Product Height	50-90(mm)
Power and Voltage	5.5KW; 220V 50HZ
Dimension L*W*H	4500*1200*1700 (mm) (can also be customized)
Weight	1100 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

BOSW720

FRESH VEGETABLE PACKING MACHINE

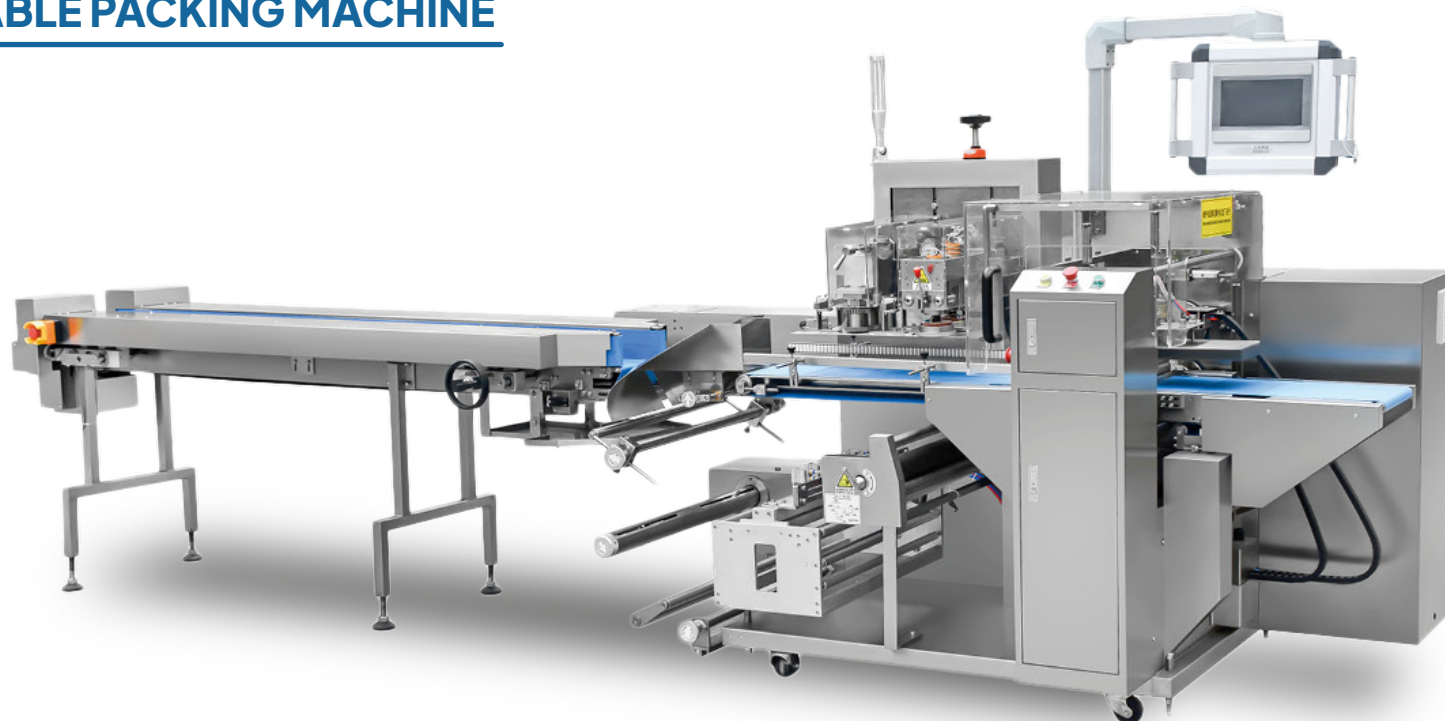

● Main Feature

- Film from below
- Box motion end sealer
- Multiple product memories
- No product, no pack
- Belt conveyor
- Automatically identify the length of packaging, etc.

● Optional Device

- Automatic Film Splicer
- Hole Puncher
- Date Printer




Model	BOSW720
Film Width	Max.720 (mm)
Packing Speed	5-120 (Packs/min)
Package Length	200-9999 (mm)
Product Width	40-320 (mm)
Product Height	5-160 (mm)
Power and Voltage	6.5KW; 220V 50HZ
Dimension L*W*H	4900*1350*1840 (mm) (can also be customized)
Weight	1800 (kg)
Air Capacity	0.6Mpa, 1.5m³/min

The above parameters are for reference only.
Detailed parameters are according to the products.

GMQ-450T4

SPAGHETTI PACKING MACHINE

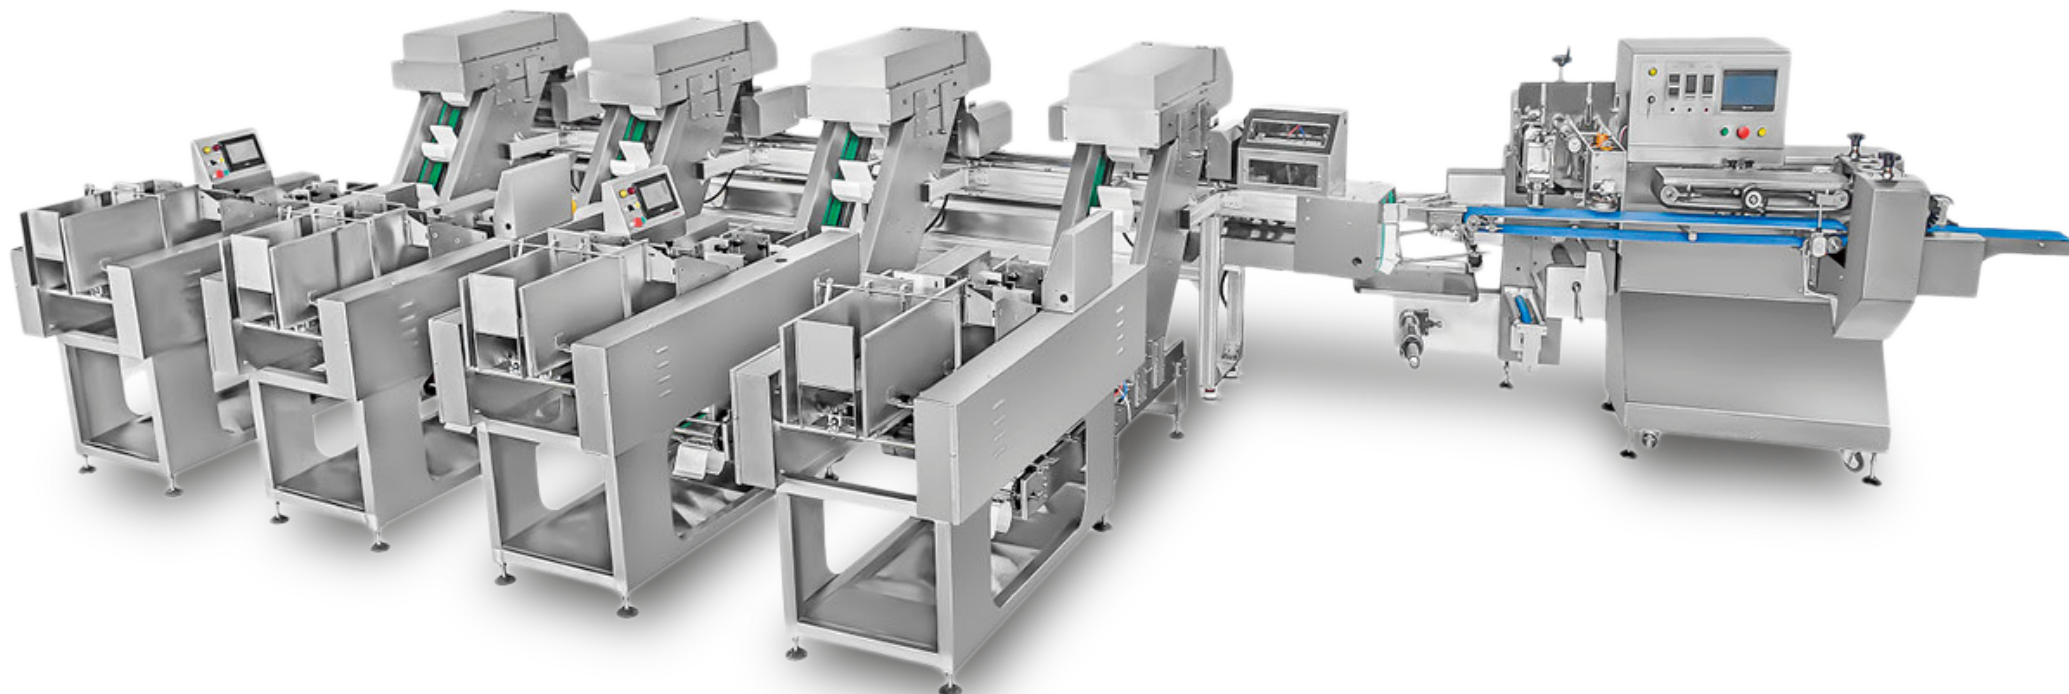

● Main Feature

- 1-4 weighing equipment
- Include alignment device, etc.

● Optional Device


- Date Printer
- Automatic Film Splicer



Model	GMQ-450T4
Film Width	Max.450 (mm)
Product Weight	110g/200-1000g
Packing Speed	70-80 packs/min (110g) 50-60 packs/min (200-1000g)
Product Length	260mm
Power and Voltage	7KW; 220V 50HZ
Dimension L*W*H	7700*3000*1600 (mm) (can also be customized)
Weight	2700 (kg)

The above parameters are for reference only.
Detailed parameters are according to the products.

OPTIONAL DEVICES

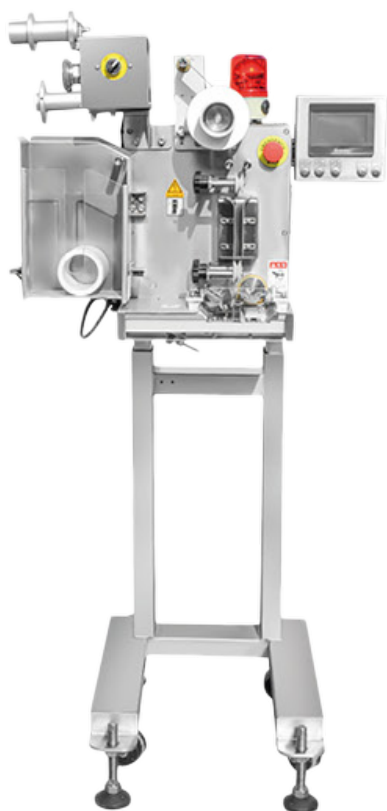

**Auto Dispenser
TBJ 240**



**Auto Dispenser
TBJ 240-B**




**Auto Dispenser
TBJ 180**



**Auto Pouch
Layer**


OPTIONAL DEVICES

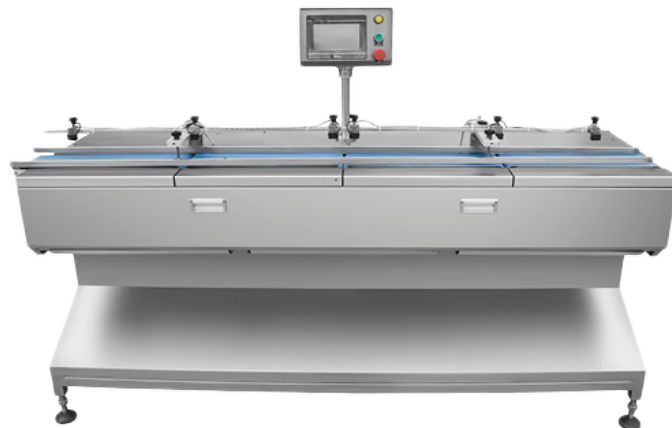

**Four-stage
Auto Feeder**



**Nitrogen
Generator**

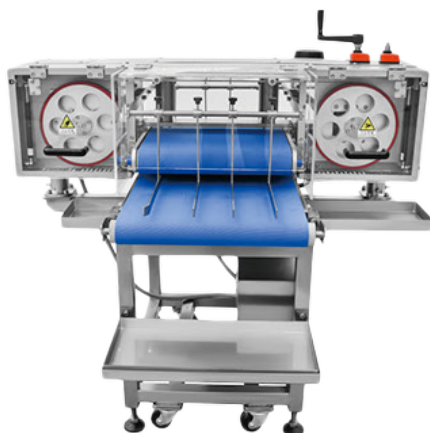


**Single-blade
Slicer**



**Double-blade
Slicer**

OPTIONAL DEVICES

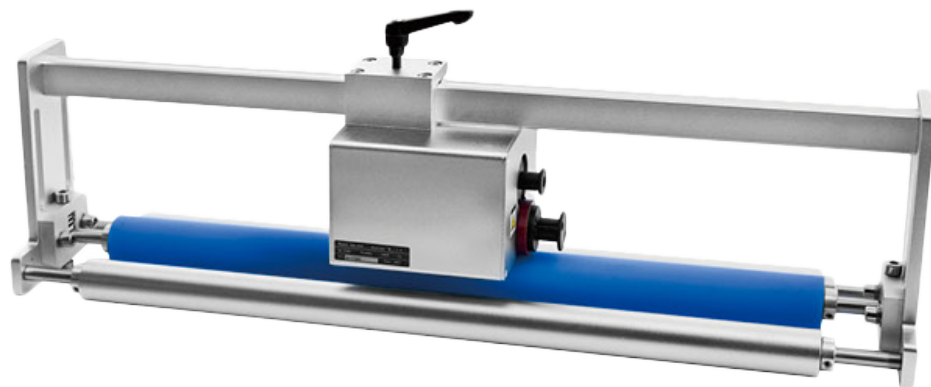

**Hot Ink
Roll Printer**



**Hot Stamp
Printer**



**Thermal
Transfer Printer**



Laser Printer

SAMPLES



SAMPLES



SAMPLES



SAMPLES



MODELS

Model	BOSS 450/99-S	BOSS 450/120-S	BOSS 450/132-S	BOSS 450/150-S	BOSS 590/150-S	BOSS 590/165-S	BOSS 590/180-S	BOSS 720/150-S	BOSS 720/165-S
Film Width (mm)	Max 450	Max 450	Max 450	Max 450	Max 590	Max 590	Max 590	Max 720	Max 720
Packing Speed (packs/min)	20-180	20-180	20-160	20-130	20-130	20-130	20-130	20-100	20-100
Package Length (mm)	80-340	90-370	95-450	95-450	100-450	150-500	150-500	120-450	200-600
Product Width (mm)	20-140	20-140	20-140	40-140	40-220	40-220	40-220	40-280	40-280
Product Height (mm)	5-40	5-60	5-70	5-75	35-75	50-90	50-110	35-75	50-90
Dimension L*W*H(mm)	4500× 970×1700	4500× 970×1700	4500× 970×1700	4500× 970×1700	4500× 1100×1700	4500× 1100×1700	4500× 1100×1700	4500× 1200×1700	4500× 1200×1700
Power (kw)	5	5	5	5	5.5	5.5	5.5	5.5	5.5
Weight (kg)	880	880	880	880	1050	1050	1050	1100	1100
Voltage	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ

The above parameters are for reference only.
Detailed parameters are according to the products.

MODELS

Model	BOSW450/100	BOSW450/120	BOSW590/120	BOSW720/160	BOSW820/160	BOSW920/160	BOSW1020/160
Film Width (mm)	Max 450	Max 450	Max 590	Max 720	Max 820	Max 920	Max 1020
Packing Speed (packs/min)	20-120	20-120	20-100	20-80	20-60	20-60	20-60
Package Length (mm)	85-400	90-500	100-600	180-600	180-600	200-600	200-600
Product Width (mm)	20-180	20-180	40-220	40-280	70-320	70-380	80-420
Product Height (mm)	5-100	5-120	5-120	5-160	5-160	5-160	5-160
Dimension L*W*H(mm)	4850× 1220×1800	4850× 1220×1800	4850× 1220×1800	4850× 1340×1800	4850× 1340×1800	4850× 1540×1900	4850× 1540×1900
Power (kw)	5.7	5.7	5.7	6.5	6.5	6.5	6.5
Weight (kg)	1400	1400	1450	1500	1600	1800	1900
Voltage	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ
Air Capacity	0.6Mpa, 1.5m ³ /min	0.6Mpa, 1.5m ³ /min	0.6Mpa, 1.5m ³ /min	0.6Mpa, 1.5m ³ /min	0.6Mpa, 1.5m ³ /min	0.6Mpa, 1.5m ³ /min	0.6Mpa, 1.5m ³ /min

The above parameters are for reference only.
Detailed parameters are according to the products.

MODELS

Model		BOSD590/150	BOSD590/180	BOSD590/195	BOSD720/150	BOSD720/180	BOSD720/195
Film Width (mm)		Max 590	Max 590	Max 590	Max 720	Max 720	Max 720
Packing Speed (packs/min)		20-140	20-140	20-140	20-110	20-110	20-110
Package Length (mm)		100-400	150-500	180-550	100-450	150-500	180-550
Product Width (mm)		40-220	40-220	40-220	40-280	40-280	40-280
Product Height (mm)		35-75	50-110	50-125	35-75	50-110	50-125
Dimension L*W*H(mm)	Packing Machine	5200× 1100×1700	5200× 1100×1700	5200× 1100×1700	5200× 1200×1700	5200× 1200×1700	5200× 1200×1700
	Shrink Tunnel	2900× 650×1700	2900× 650×1700	2900× 650×1700	2900× 700×1700	2900× 700×1700	2900× 700×1700
Power (kw)	Packing Machine	4	4	4	4	4	4
	Shrink Tunnel	19	19	19	19	19	19
Weight (kg)	Packing Machine	1100	1100	1100	1200	1200	1200
	Shrink Tunnel	400	400	400	450	450	450
Voltage	Packing Machine	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ	220V 50HZ
	Shrink Tunnel	380V 50HZ	380V 50HZ	380V 50HZ	380V 50HZ	380V 50HZ	380V 50HZ

The above parameters are for reference only.
Detailed parameters are according to the products.