

Large Packaging Machine

GP720



- ◆ PLC control with touch screen
- ◆ Servo motor with vacuum belts for film pulling system
- ◆ Servo motor driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 720mm
- Bag Width 100~350mm
- Bag Length 100~500mm
- Capacity 10~50bags/min
- Voltage 3P 380V/220V, 50-60HZ, 5KW
- Air consumption 0.6Mpa, 280L/min
- Dimension L1430*W1702*H1930mm
- Weight 650kg




Stand-up Quad-seal V.F.F.S Machine

GP720HC



- ◆ PLC control with touch screen
- ◆ Servo motor with vacuum belts for film pulling system
- ◆ Servo motor driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 720mm
- Bag Width 100~350mm
- Bag Length 100~500mm
- Capacity 5-35bags/min
- Voltage 3P 380V/220V, 50-60HZ, 7KW
- Air consumption 0.6Mpa, 280L/min
- Dimension L1478*W2004*H2247mm
- Weight 800kg

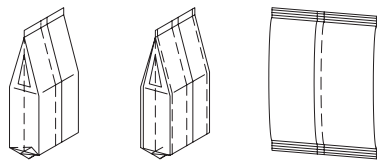

Inclined V.F.F.S Machine(for PE film)

GP800



- ◆ PLC controller with touch screen interface
- ◆ Servo motor with vacuum belts for film pulling system
- ◆ Servo motor driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 800mm
- Bag Width 200~400mm
- Bag Length 200~450mm
- Capacity 5~30bags/min
- Voltage 3P 380V/220V, 50-60HZ, 5KW
- Air consumption 0.6Mpa, 280L/min
- Dimension L1430*W1956*H1630mm
- Weight 550kg



Extra Large bag V.F.F.S Machine

GP1020



- ◆ PLC controller with touch screen interface
- ◆ Servo motor with vacuum belts for film pulling system
- ◆ Servo motor driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 1020mm
- Bag Width 200~500mm
- Bag Length 200~600mm
- Capacity 2~20bags/min
- Voltage 3P 380V/220V, 50-60HZ, 6.5KW
- Air consumption 0.6Mpa, 280L/min
- Dimension L1756*W1906*H2345mm
- Weight 700kg



Wide range of application
High performance packaging solution
Custom made design
Secure sealing quality
Easy control
Affordable price



Innovation



High Efficiency



Cost Save



Good Service

TTPACK TRADING & TECHNICAL SERVICES COMPANY LIMITED

Sales: 0869 833 002 Hotline: 0334 487 184 Email: marketing@ttpack.com.vn

Sachet package / Single lane

GP200



- ◆ PLC control with touch screen
- ◆ Servo drive for film pulling system
- ◆ Pneumatic driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 200mm
- Bag Width 20~60mm
- Bag Length 50~200mm
- Capacity 10~50bags/min
- Voltage 3P 380V/220V, 50-60HZ, 3KW
- Air consumption 0.6Mpa, 200L/min
- Dimension L1018*W1328*H1709mm
- Weight 350kg



Sachet package / Small Size

GP240



- ◆ PLC control with touch screen
- ◆ Servo drive for film pulling system
- ◆ Pneumatic driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking
- ◆ 100 data store possibility

- Max.film width 240mm
- Bag Width 40~120mm
- Bag Length 55~150mm
- Capacity 10~70bags/min
- Voltage 3P 380V/220V, 50-60HZ, 3KW
- Air consumption 0.6Mpa, 200L/min
- Dimension L1200*W910*H1235mm
- Weight 350kg




Two Lanes Sachet Packaging Machine

GP240B



- ◆ PLC control with touch screen
- ◆ Servo drive for film pulling system
- ◆ Pneumatic driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 240mm
- Bag Width 40~110mm
- Bag Length 40~150mm
- Capacity 10~100bags/min (one lane)
- Voltage 3P 380V/220V, 50-60HZ, 4.5KW
- Air consumption 0.6Mpa, 400L/min
- Dimension L1582*W1362*H1626mm
- Weight 660kg

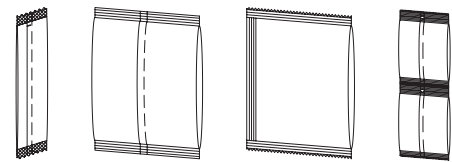

Two Lanes Round-corner Stickpack

GP240BS



- ◆ PLC control with touch screen
- ◆ Servo drive for film pulling system
- ◆ Pneumatic driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking
- ◆ Round corner by die cutting

- Max.film width 240mm
- Bag Width 20~60mm
- Bag Length 50~180mm
- Capacity 10~40bags/min (one lane)
- Voltage 3P 380V/220V, 50-60HZ, 4.5KW
- Air consumption 0.6Mpa, 400L/min
- Dimension L1582*W1362*H1626mm
- Weight 680kg



Triangle bag Packaging Machine

GP240BT



- ◆ PLC controller with touch screen interface
- ◆ Servo drive for film pulling system
- ◆ Servo motor driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 240mm
- Bag Width 40~80mm
- Bag Length 50~110mm
- Capacity 10~70bags/min (one lane)
- Voltage 3P 380V/220V, 50-60HZ, 4.5KW
- Air consumption 0.6Mpa, 400L/min
- Dimension L1582*W1362*H1626mm
- Weight 660kg




Four Lanes Sachet package / Small Size

GP240F



- ◆ PLC control with touch screen
- ◆ Servo drive for film pulling system
- ◆ Pneumatic driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 240mm
- Bag Width 40~110mm
- Bag Length 50~180mm
- Capacity 10~100bags/min (one lane)
- Voltage 3P 380V/220V, 50-60HZ, 9KW
- Air consumption 0.6Mpa, 800L/min
- Dimension L3084*W1362*H1626mm
- Weight 1000kg

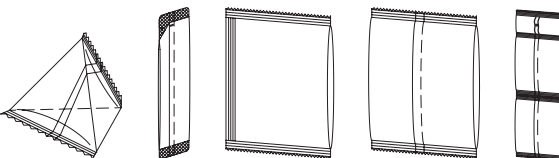

Sachet package / Small Size

GP320




- ◆ PLC control with touch screen
- ◆ Servo drive for film pulling system
- ◆ Pneumatic driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 320mm
- Bag Width 40~150mm
- Bag Length 50~150mm
- Capacity 10~60bags/min
- Voltage 3P 380V/220V, 50-60HZ, 3KW
- Air consumption 0.6Mpa, 200L/min
- Dimension L1113*W1300*H1447mm
- Weight 350kg



Dual Servo V.F.F.S Machine

GP480

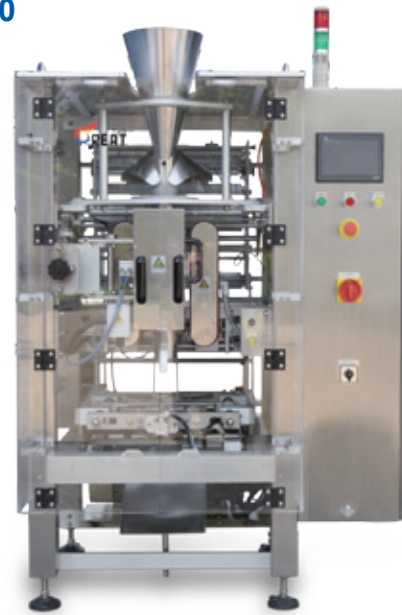

- ◆ PLC control with touch screen
- ◆ Servo motor with vacuum belts for film pulling system
- ◆ Servo motor driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 480mm
- Bag Width 100~230mm
- Bag Length 80~310mm
- Capacity 10~100bags/min
- Voltage 3P 380V/220V, 50-60HZ, 4.5KW
- Air consumption 0.6Mpa, 280L/min
- Dimension L1128*W1491*H1560mm
- Weight 450kg




Two Lanes Servo control V.F.F.S Machine

GP480B




- ◆ PLC control with touch screen
- ◆ Servo motor with vacuum belts for film pulling system
- ◆ Servo motor driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 480mm
- Bag Width 100~230mm
- Bag Length 80~330mm
- Capacity 15~100bags/min (one lane)
- Voltage 3P 380V/220V, 50-60HZ, 5.5KW
- Air consumption 0.6Mpa, 400L/min
- Dimension L1858*W1491*H1560mm
- Weight 600kg

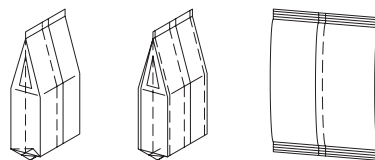

Medium Servo V.F.F.S Machine

GP580

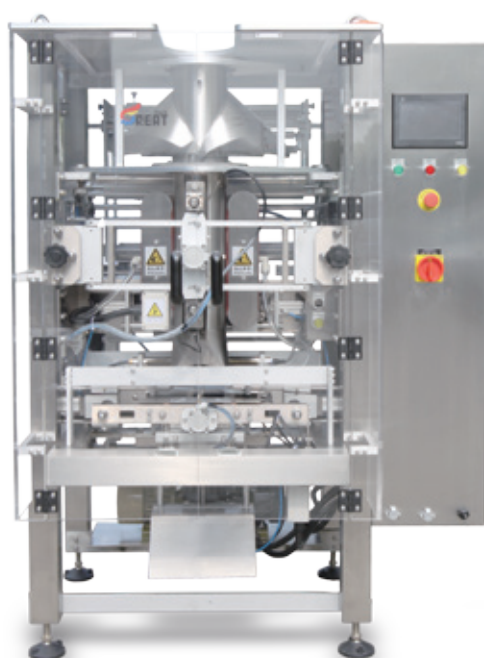

- ◆ PLC control with touch screen
- ◆ Servo motor with vacuum belts for film pulling system
- ◆ Servo motor driven end sealing
- ◆ Intelligent temperature control, sealing more perfect
- ◆ Eye mark sensor for film tracking

- Max.film width 580mm
- Bag Width 100~260mm
- Bag Length 100~350mm
- Capacity 15~80bags/min
- Voltage 3P 380V/220V, 50-60HZ, 4.5KW
- Air consumption 0.6Mpa, 280L/min
- Dimension L1248*W1491*H1680mm
- Weight 500kg

